

Data Sheet

DC0900U10-053




Directional Coupler

750 MHz-1050 MHz



Features

- Small Size (2×2mm)
- Very Low Loss
- Excellent directivity
- Broad frequency coverage
- High Isolation
- Low VSWR
- Good Repeatability
- Tape & Reel
- Power handling:5 watts

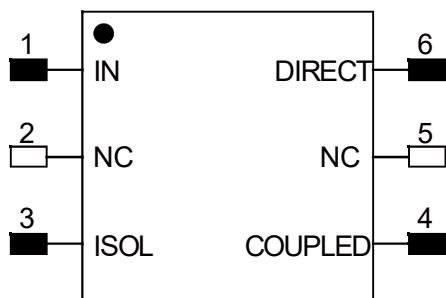


TOP VIEW

Applications

- Phase shifter / Attenuator
- Balanced amplifier / LNA configurations
- Modulators
- Mixers
- Power combining /dividing

Notes:

1. This part has passed through 100% RF test.
2. Suggest to add Capacitors of DC Blocker between Pins(with black color) and external circuit to prevent DC signal entry to guarantee parts normal work.
3. Suggest to add a TVS Diode in parallel between Electrode (with black color) and Capacitor of DC Blocker to provide ESD protection for the product. TVS Diode use ON Semiconductor's ESD9101 is recommended.

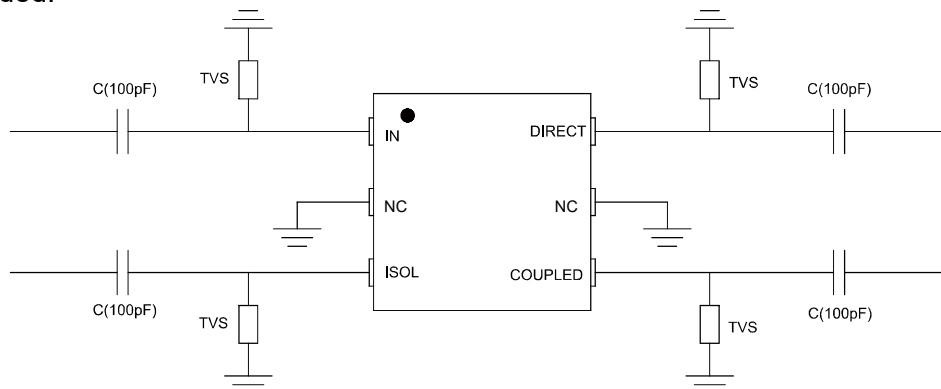

ESD Rating

Human Body Model (HBM): $\leq 650\text{V}$ in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): $\leq 50\text{V}$ in accordance with ANSI/ESD STM 5.2 - 1999

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

Rev A4.2

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Data Sheet

DC0900U10-053

Directional Coupler


750 MHz-1050 MHz



Electrical Specifications at 25° C

Part No.	Freq. Range (MHz) FL~FU	Power (W)	Size LxW (mm)	Coupling (dB)	Insertion loss (dB)	VSWR(:1)	Directivity (dB)
DC0900U10-053	750~800	5	2X2	10.9~10.5	0.42	1.10	17
	800~850			10.5~10		1.10	
	850~900			10~9.6		1.10	
	900~950			9.6~9.2		1.10	
	950~1000			9.2~8.7		1.10	
	1000~1050			8.7~8.4		1.10	

Typical Performance (-40°C, 25°C, 85°C: 750-1050 MHz)

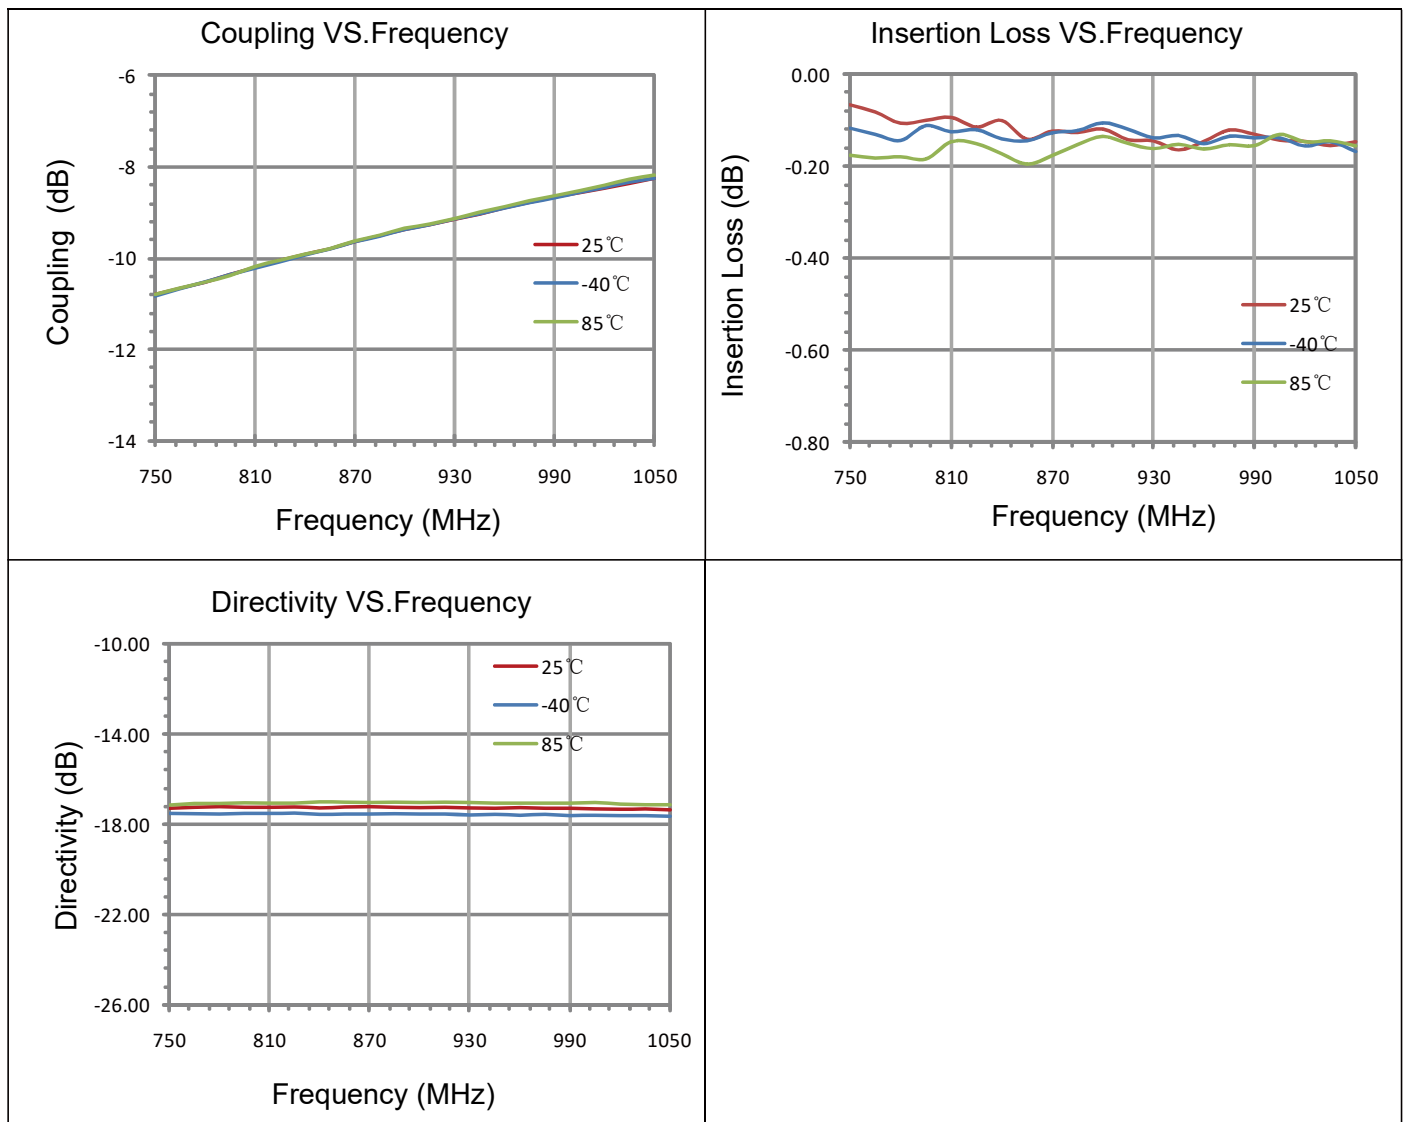

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

Rev A4.2

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com


Data Sheet

DC0900U10-053

Directional Coupler
750 MHz-1050 MHz



Typical Performance (-40°C, 25°C, 85°C: 750-1050 MHz)

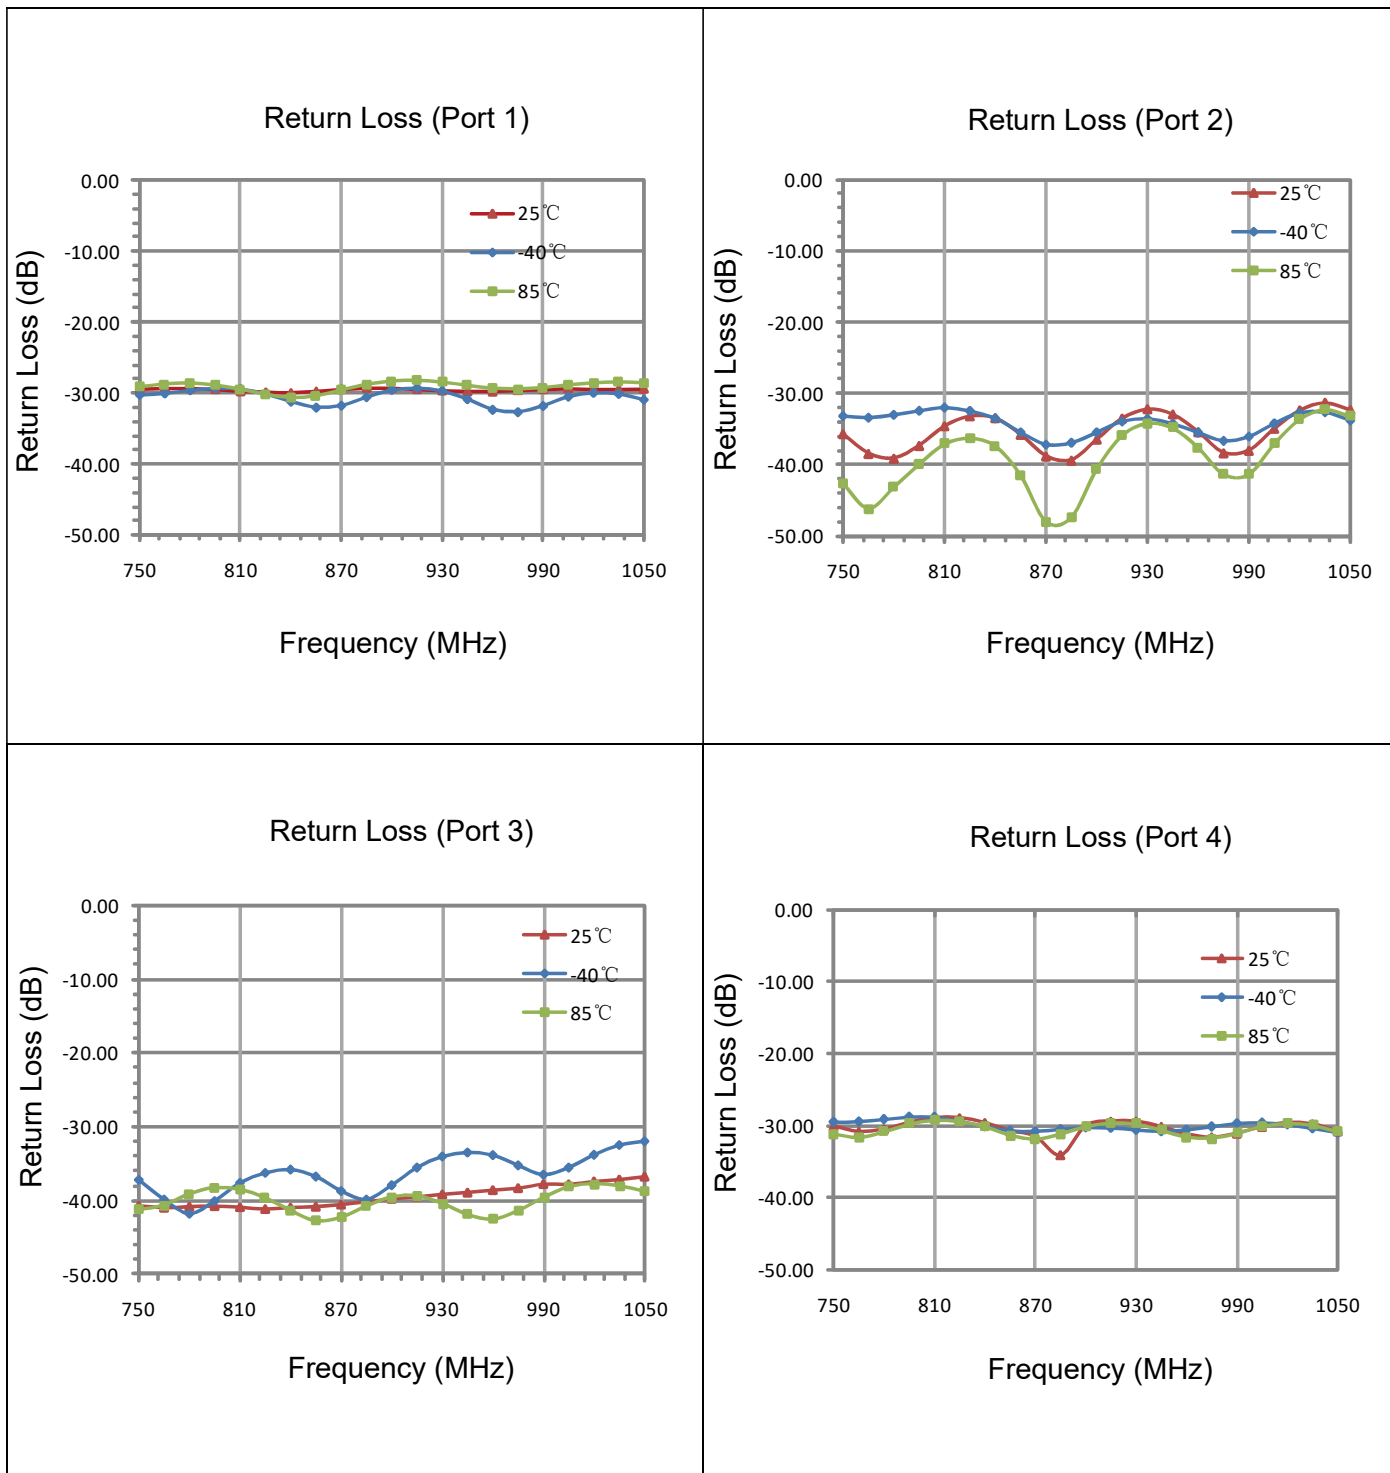

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

Rev A4.2

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Data Sheet


DC0900U10-053

Directional Coupler


750 MHz-1050 MHz



Outline Drawing

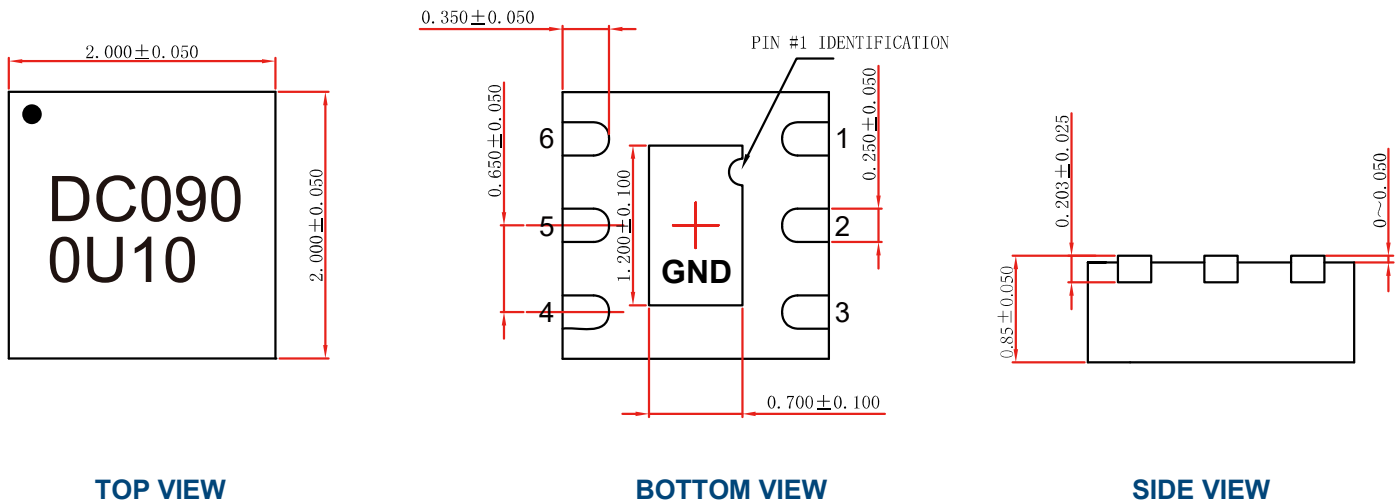

Land Pattern

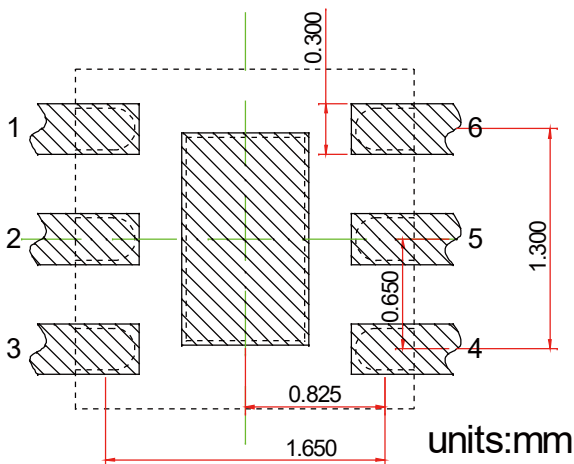


Recommended Land Pattern

Top View

Notes: All dimensions show in millimeters

Pin Out

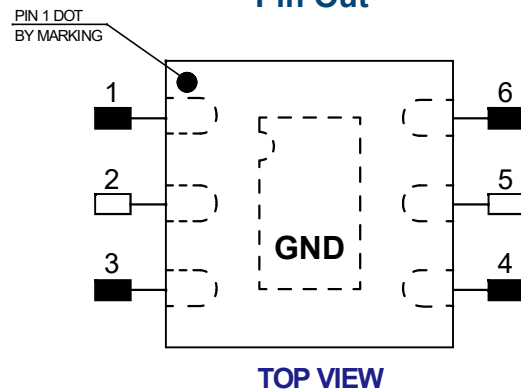

Notes:

1. Require to add Capacitors of DC Blocker between Pins (with black color) and external circuit to prevent DC signal entry to guarantee parts normal work.
2. This part has passed through 100% RF test.

Pin #	Connection
1	IN
2	NC
3	ISOL
4	COUPLED
5	NC
6	DIRECT
Center Pad	GND

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

Rev A4.2

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com