

Number Code	Frequency Range (GHz)
3	28-31
5	32-36
7	36-50

The diagram illustrates the mapping from physical layer parameters to MAC address fields. The parameters are grouped as follows:

- Series**: Indicated by ****.
- Frequency**: Indicated by **.
- Attenuation**: Indicated by **.
- Temperature Coefficient Code**: Indicated by **.
- Frequency Range Code**: Indicated by *.

The Frequency Range Code field is further detailed in the following table:

Number Code	Frequency Range (GHz)
3	28-31
5	32-36
7	36-50

3. SAMPLE INSPECTION:
3.1. DESTRUCTIVE TESTING:

3.1.1. SELECT THREE (3) UNITS FROM LOT AND MEASURE TOTAL DCR EVERY 20°C OVER THE TEMPERATURE RANGE FROM -55°C THROUGH +125°C

3.1.2. CALCULATE DCA BY FOR EACH MEASUREMENT, USING EQUATION 3.2.1.1


3.1.3. CALCULATE, USING LINEAR REGRESSION, THE SLOPE OF THE ATTENUATION VS. TEMPERATURE CURVE

3.1.4. CALCULATE TCA USING THE FOLLOWING FORMULA:


$$TCA = \frac{\text{SLOPE}}{\text{ATTENUATION @ } 25^{\circ}\text{C}}$$

Notes on RF Testing and Circuit Layout


KTCA 16-36GHz series (for Gold Terminal type) Test Fixture

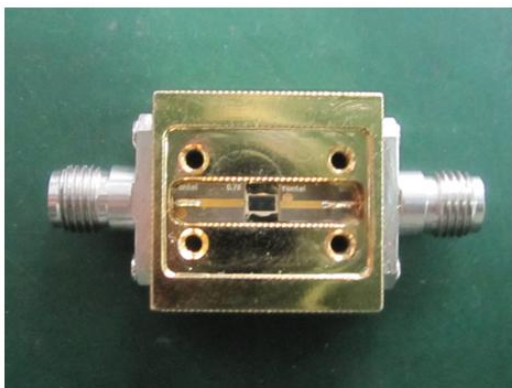


PCB Test Board

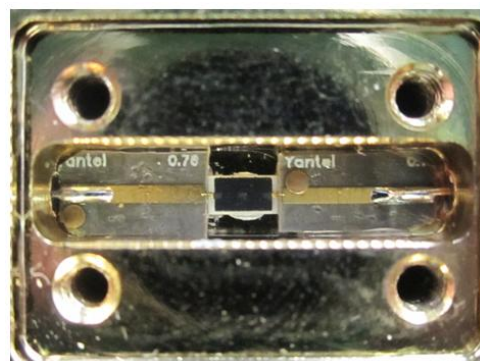


Connect test part to Test Fixture

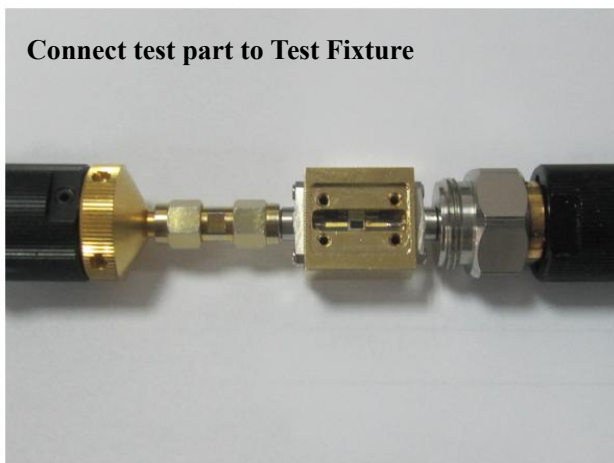


Equipment Calibration

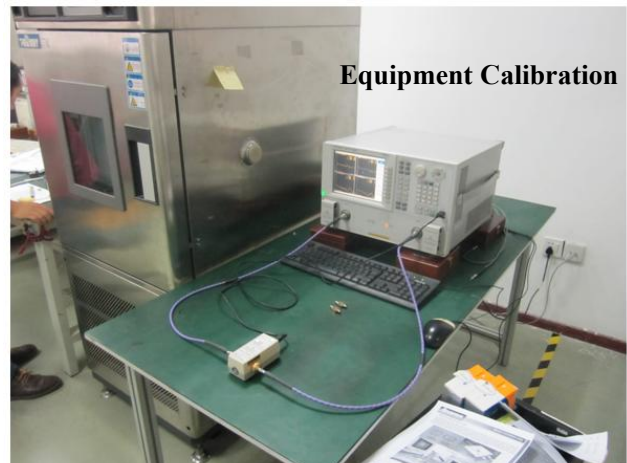

Room
Temperature
Test

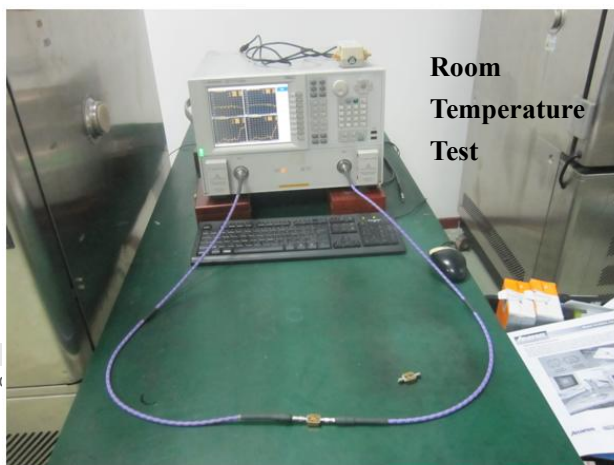

High-Low
Temperature
Test

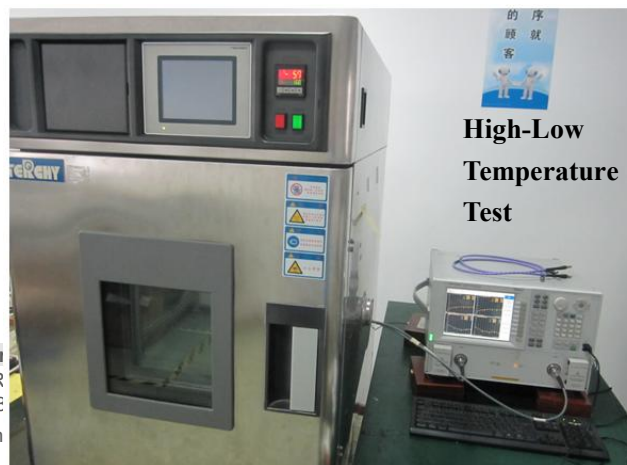

- 1、 S2P documents are available for download
- 2、 16-36GHz test fixture is rentable (only for Chinese customers) , otherwise please purchase them.


For any questions or needs, please feel free to contact inform@yantel-corp.com.

Package Outlines

All dimensions shown in mm unless stated otherwise

Unit: mm

Note: Dimension tolerance in ± 0.10 otherwise mention.

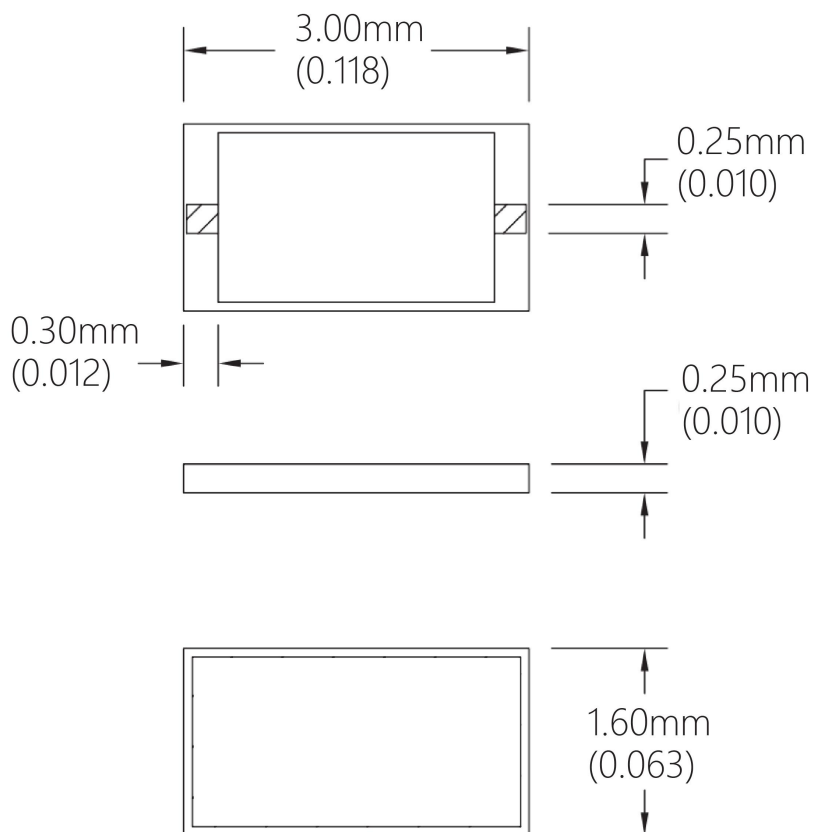


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Tape & Reel Drawing


All dimensions shown in mm unless stated otherwise

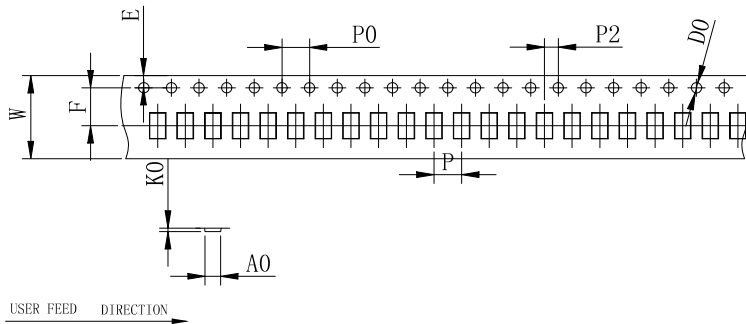


Remarks:

- 1>Total tolerance of any 10 sprocket holes is $\leq \pm 0.20\text{mm}$.
- 2>The thickness is measured on the margin of carrier tape.
- 3>Carrier camber should be not more than 1mm per 100mm through a length of 250mm.
- 4>The tolerance which is not marked is $\pm 0.1\text{mm}$
- 5>AO,BO are measured from 0.3mm above the bottom of the cavity. KO refers to the inside depth.
- 6>The angle R which is not marked on the cavity is 0.2-0.3.
- 7>Draft angle which is not marked is 3° .
- 8>25 m/reel; 6000 units (maximum) / T&R

symbol	A0	B0	K0	P0	P	P2
spec	1.85 ± 0.1	3.2 ± 0.1	0.6 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	2.0 ± 0.1
symbol	W	T	E	F	D0	
spec	12.0 ± 0.3	0.3 ± 0.05	1.75 ± 0.1	5.5 ± 0.1	$\Phi 1.5^{+0.1}_{-0.0}$	

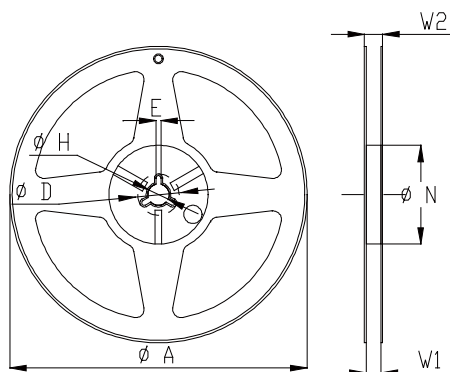

Symbol	Dimensions(mm)
A	180^{+0}_{-3}
N	60^{+1}_{-0}
W1	12.0 ± 0.3
W2	14 ± 1.0
D	25 ± 0.8
H	13 ± 0.2
E	3 ± 0.5

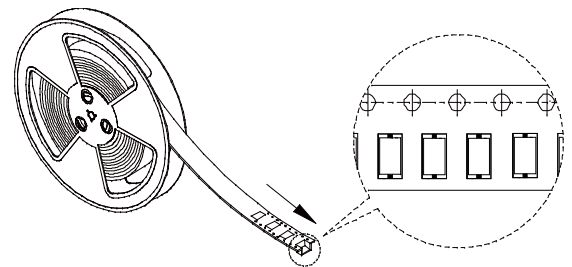

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com