

Microstrip SMD Circulatorz

◆ 12.7 to 15.4 GHz

◆ 50 Ω

◆ 10 W


Features

- Thin film
- Low insertion loss
- High isolation
- High stability and reliability

Specifications

ITEM	UNIT	Specification	NOTE
Frequency Range	GHz	12.7 ~ 15.4	
Direction		CW	P1→P2→P3
Insertion Loss	dB max.	0.7	Over Temp(-40 °C to +85 °C)
Isolation	dB min.	18	Over Temp(-40 °C to +85 °C)
Return Loss	dB min.	18	Over Temp(-40 °C to +85 °C)
Impedance	Ω	50	
Average Power	W	10	
Operating Temperature	°C	-40 ~ +85	

Package Outlines

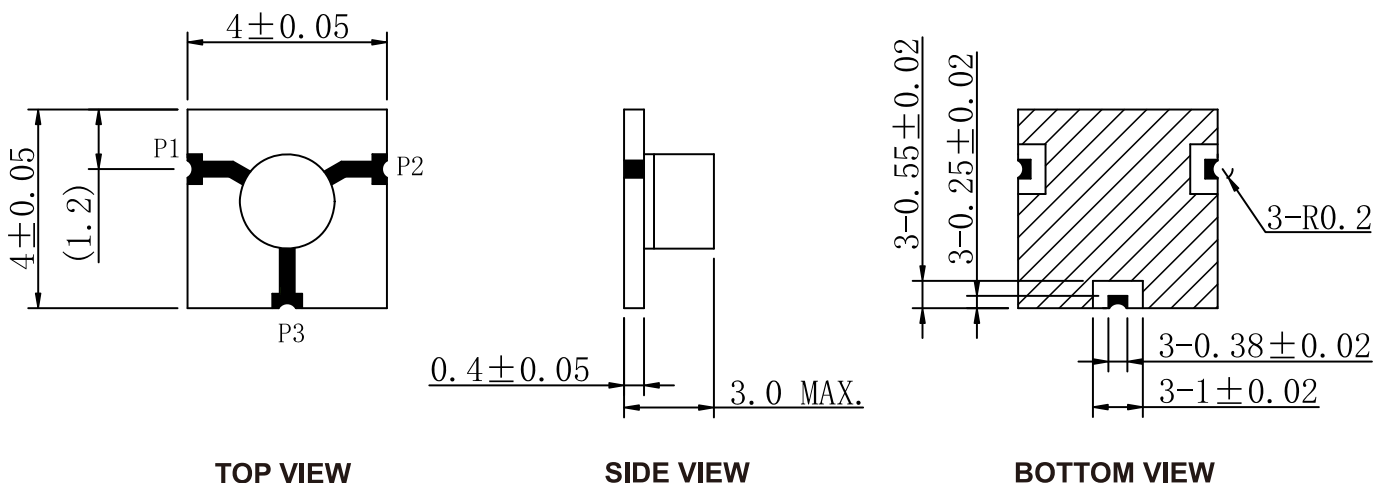

Typical Electrical Characteristics (T=25°C)

