

Microstrip SMD Circulatorz

◆ 14 to 18 GHz

◆ 50 Ω

◆ 20 W


Features

- Thin film
- Low insertion loss
- High isolation
- High stability and reliability


Specifications

ITEM	UNIT	Specification	NOTE
Frequency Range	GHz	14 ~ 18	
Direction		CCW	P2→P1→P3
Insertion Loss	dB max.	0.6	Over Temp(-55℃ to +85 ℃)
Isolation	dB min.	18	Over Temp(-55℃ to +85 ℃)
VSWR	max.	1.35	Over Temp(-55℃ to +85 ℃)
Impedance	Ω	50	
Power	W	20	
Operating Temperature	℃	-55 ~ +85	


Package Outlines

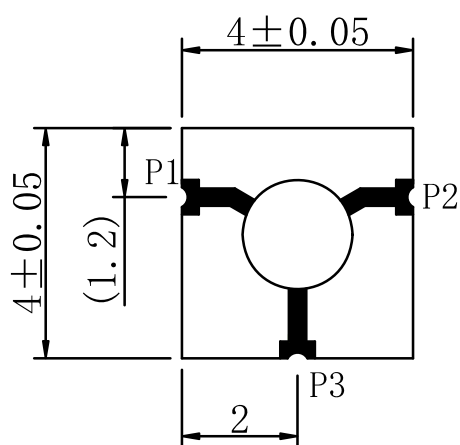

TOP VIEW



SIDE VIEW

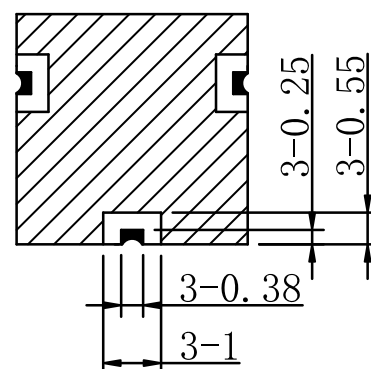

BOTTOM VIEW

Typical Electrical Characteristics (T=25°C)

