


Features

- Multilayer monolithic construction yields high reliability
- Low insertion loss and small size SMD chip design
- Can simplify your complex tuning and circuit design
- LTCC process

Specifications


NO.	Parameter		SPEC
1	Frequency (MHz)		300-2000
2	Insertion Loss (dB) @25℃	300-2000MHz	≤1.5
3	Ripple (dB)	300-2000MHz	≤0.5
4	Attenuation(dBc)	10MHz~230MHz	≥35
		2400MHz~3400MHz	≥35
5	VSWR(In BW)		≤1.6
6	Phase Consistency		±5°（8 pcs per group）
7	Amplitude Consistency		0.1dB
8	Group Latency Consistency		<0.5nS
9	In/Output Impedance (Ω)		50
Operating & Storage Condition (Component)			
Operation Temperature Range: -40℃ ~ +85℃			
Storage Temperature Range: -40℃~ +85℃			
Storage Condition before Soldering (Included packaging material)			
Storage Temperature Range: +5 ~ +40 ℃			
Humidity: 30 to 70% relative humidity			

Construction



PIN	Connection
1	Input Port
2	Output Port
3	GND
4	GND

Mounting Considerations

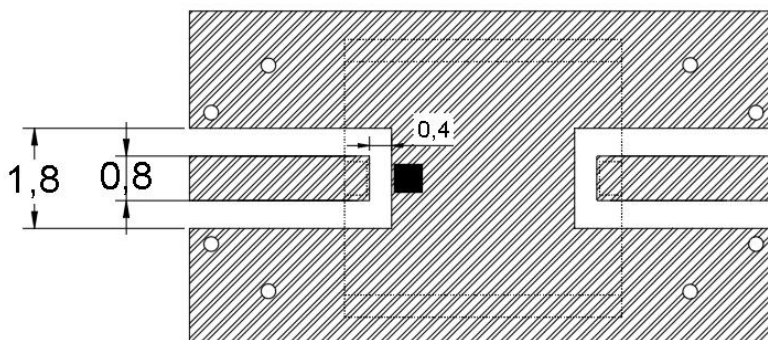

Unit: mm


Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China


Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Dimensions

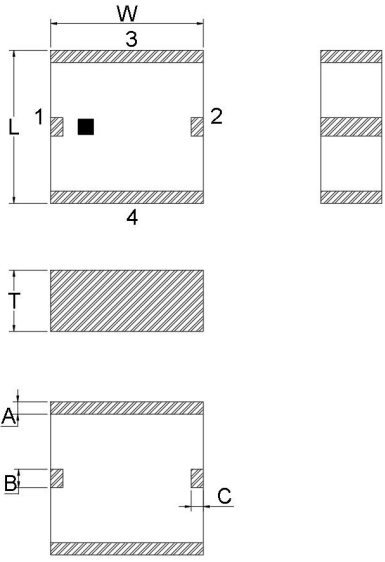Figure	Symbol	Dimension (mm)
	L	5.00± 0.20
	W	5.00± 0.20
	T	2.00± 0.20
	A	0.40± 0.10
	B	0.60 ± 0.10
	C	0.40± 0.10

Solder Reflow Standard Conditioning

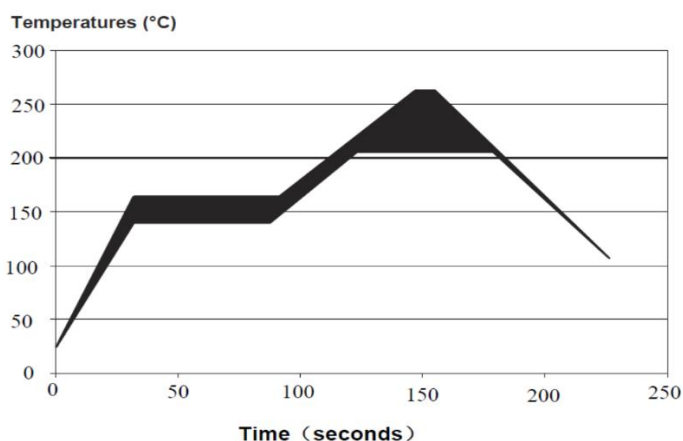

Storage Conditions

Temperature : +5 to +30 °C

Humidity : 20 to 70% RH

Term of storage : Within 12 months (After the delivery) *

Baking : Unnecessary

* After peeling off cover tape, do not keep exposing the products to the open air. For the products stored longer than 12 months, confirm their terminals and solderability before use.

Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com