

Features

- Multilayer monolithic construction yields high reliability
- Low insertion loss and small size SMD chip design
- Can simplify your complex tuning and circuit design
- LTCC process

Specifications

NO.	Parameter	SPC
1	Frequency range	11880-12680 MHz
2	Insertion Loss	3.7dB max. at +25°C;
3	Ripple	0.5dB @any200 MHz
4	Attenuation	60dB min. @ DC-7000MHz 50 dB min. @ 7620MHz 45 dB min. @ 9300MHz 25 dB min. @10200-11000MHz 20 dB min. @ 13600MHz 25 dB min. @ 14400MHz 45 dB min. @15200-16000MHz 50 dB min. @ 18600MHz 40 dB min. @20000-26000MHz
5	VSWR (In BW)	1.5max.
6	Group delay variation	2ns
7	Port Impedance	50Ω
8	Power	0.5W max.
9	Operation Temperature Range	-45°C ~ +85°C

Construction



PIN	Connection
P1	Input port
P2	Output port
P3	GND

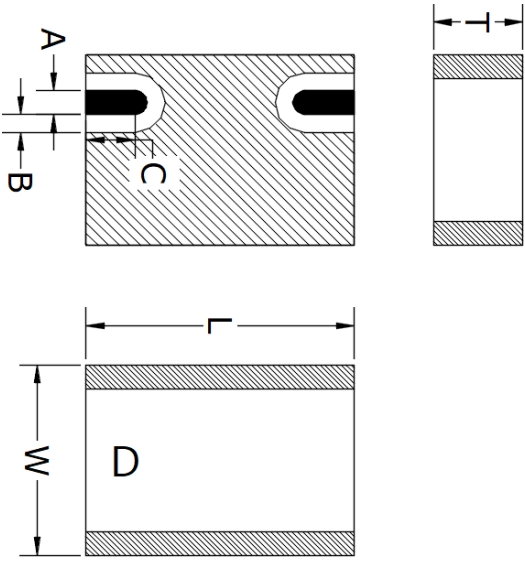
Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Dimensions

Figure	Symbol	Dimension (mm)
	L	4.5 ± 0.20
	W	3.2 ± 0.20
	T	1.5 ± 0.20
	A	0.4 ± 0.10
	B	0.3 ± 0.10
	C	0.85 ± 0.10

Typical Electrical Characteristics (T=25°C)

