


Features

- Multilayer monolithic construction yields high reliability
- Low insertion loss and small size SMD chip design
- Can simplify your complex tuning and circuit design
- LTCC process

Specifications


NO.	Specification				
1	Frequency range (MHz)		1560~1610	2400~2500	4900~5950
2	Insertion Loss (dB) @25℃		0.6	0.7	0.8
3	Insertion Loss (dB) @ -40 ~ +85 ℃		0.75	0.85	0.95
4	VSWR		2.0 max.	2.0 max.	2.0 max.
5	Impedance (Ω)		50-	50	50
6	Attenuation (dB)	860~960MHz	-	-	24 min.
		1540~1605 MHz	-	-	24 min.
		1710~1990 MHz	-	-	25 min.
		2170 MHz	-	-	30 min.
		2400~2500 MHz	14 min.	-	-
		3600~3750 MHz	-	10 min.	-
		4800~5000 MHz	15 min.	20 min.	-
		5000~6000MHz	15 min.	-	-
		7200~7500 MHz	-	10 min.	-
		8100~8800 MHz	-	-	10 min.
		8820~9600MHz	-	-	15 min.
		9600~9800 MHz	-	10 min.	15 min.
		9800~10000 MHz	-	10 min.	25 min.
		10000~11800 MHz	-	-	25 min.
7	Isolation (dB)	1560~1610 MHz	-	10 min.	10 min.
		2400~2500 MHz	10 min.	-	10 min.
		4900~5950 MHz	10 min.	10 min.	-
Operating & Storage Condition (Component)					
Operation Temperature Range: -40℃ ~ +85℃					
Storage Temperature Range: -40℃~ +85℃					
Storage Condition before Soldering (Included packaging material)					
Storage Temperature Range: +5 ~ +40 ℃					
Humidity: 30 to 70% relative humidity					

Construction

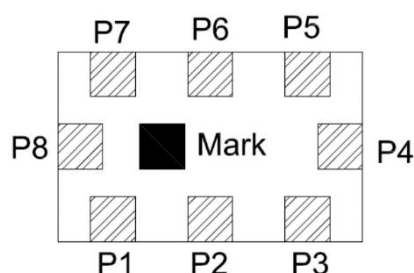


PIN	Connection	PIN	Connection
1	GND	5	GND
2	Common Port	6	High Frequency Port (5G)
3	GND	7	GND
4	Low Frequency Port (1.5G)	8	Middle Frequency Port (2.4G)

Dimensions

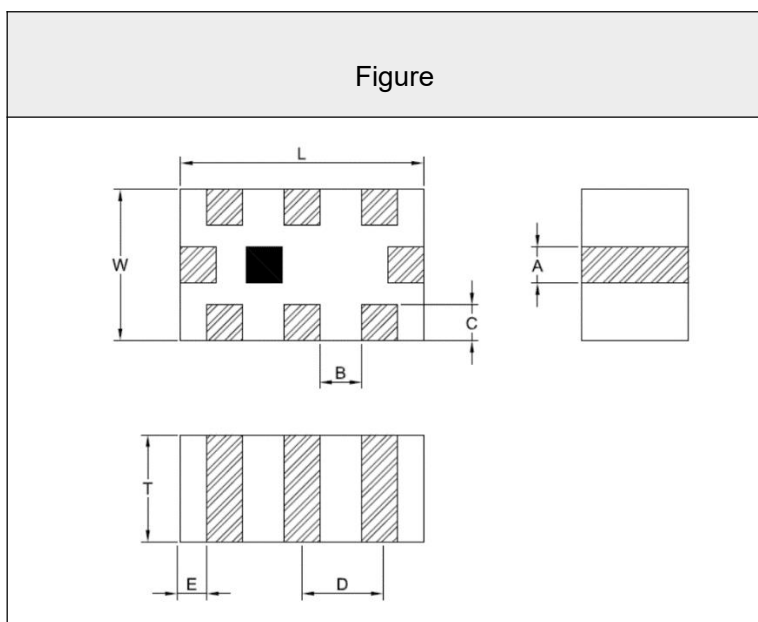Figure	Symbol	Dimension (mm)
	L	2.0±0.1
	W	1.25±0.1
	T	0.95 max.
	A	0.3±0.1
	B	0.35±0.1
	C	0.30 ± 0.15
	D	0.65±0.05
	E	0.2±0.1

Recommended PCB Layout and Land Pattern

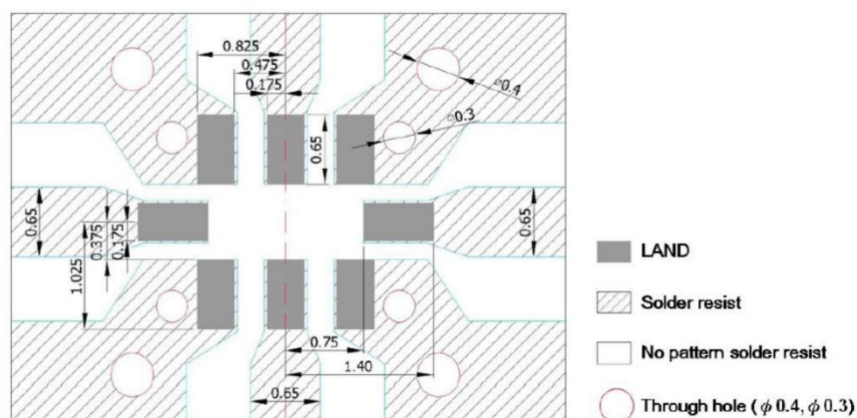

Unit: mm

Line width to be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.


Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China


Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Typical Electrical Characteristics (T=25°C)

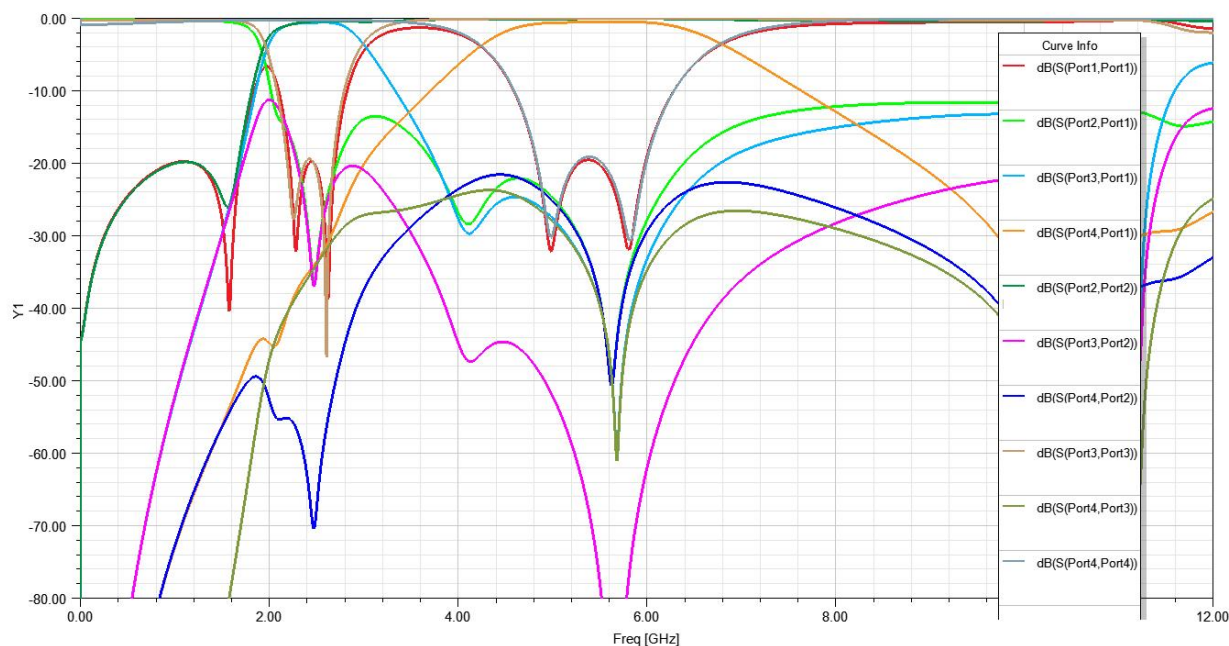

Solder Reflow Standard Conditioning

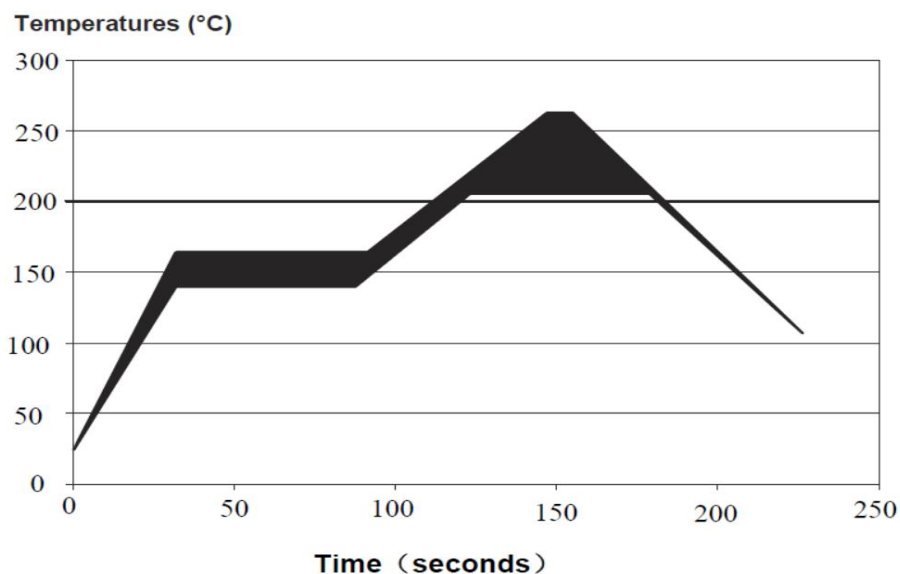

Storage Conditions

Temperature : +5 to +30 °C

Humidity : 20 to 70% RH

Term of storage : Within 12 months (After the delivery)

*Baking : Unnecessary

* After peeling off cover tape, do not keep exposing the products to the open air. For the products stored longer than 12 months, confirm their terminals and solderability before use.

Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com